

LiAS Design Notes


This preliminary design is produced by the Lighting Application Specialist (LiAS) team of Signify UK based on information supplied by the Customer for the purpose of identifying suitable products and costing the proposal. This design cannot be used for Construction, as this design does not purport to eliminate health and safety risks as a CDM Regulation risk assessment has not been undertaken.

Depending on the level of information received, a number of assumptions may have been applied in order to create an indicative lighting proposal and costing model, according to lighting industry guidelines and incorporating industry best practice methods. These assumptions are documented below and will require confirmation by the Principal Designer (which is not Signify UK) during the detailed design phase.

Project Specific Design Comments:

- The lighting calculations have been produced using Lidl Specification lighting classes.
- Where column heights have not been provided/specified, these have been assumed to be 6m. Where wall/ceiling mounting heights have not been provided/specified, these have been assumed to be 3.25m/4.1m.
- It has been assumed that luminaires on columns will be mounted post-top or on 0.5m outreach brackets, canopy luminaires will be ceiling mounted and LL-E/LL-E EM luminaires will be wall mounted.
- LL-E EM luminaires should be a maximum of 7m from the centre of one luminaire to the centre of the next.
- Signify has not undertaken any emergency lighting calculations. Luminaires marked as emergency fittings are for indicative purposes only. It is the responsibility of the Principal Designer to ensure emergency lighting calculations are performed and that all emergency evacuation routes are lit to a suitable standard.
- Preliminary Design proposals produced by the Signify LiAS Team are not to be used for installation purposes. It is the responsibility of the Principal Designer and/or Principal Contractor to ensure all Installation and Maintenance can be done in a safe manner, carried out by competent persons, based on their agreed Risk Assessments and Method Statements.
- The Luminaire Maintenance Factors have been based on 6-year cleaning intervals within an E3/E4 Environmental Zone and it is assumed that lamp/luminaire failures will be replaced on a 'spot replacement'.
- Energy consumptions have been based on the luminaire/s having Constant Light Output (CLO) enabled and the quoted wattage/s are the average over 100,000 hours (without dimming).
- The design calculations produced by Signify do not account for the effect obstructions, such as trees, will cause.
- Signify has not been provided with utility plans showing Buried, Above Ground or Overhead utilities. Therefore, all column/luminaire locations are indicative and are subject to review/verification by the Principal Designer.
- Unless stated otherwise, Signify has not visited site. Therefore, all column/luminaire locations are indicative and are subject to an onsite verification arranged/performed by the Principal Designer.
- Signify has not produced any Private Cable Network electrical calculations or reviewed the DNO network to confirm power supplies to the proposed lighting.
- Signify has not performed any asset condition testing and therefore assumes that any existing lighting columns/wall mounted brackets are structurally capable of supporting the weight & windage of the proposed luminaire/s. This must be verified by the Principal Designer before installation works commence.
- Unless stated otherwise, Signify is not supplying the new lighting columns (including brackets etc) and therefore it is the responsibility of the Principal Designers to confirm that all proposed equipment is suitable for the intended locations (e.g. raise & lower, ground condition, foundation type, saline environment, etc).
- Unless stated otherwise, luminaires will be supplied in their standard colour.



Luminaire Schedule

|                                                                                                                     |                                                                                                |                                                                                                                      |
|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| <br>LL-Canopy                    | LL-Canopy<br>Qty - 27<br>Mounting Height - 4.1m<br>Tilt - 0 Degrees                            | Carpark<br>HORIZONTAL LUX<br>Average 16.6<br>Maximum 69<br>Minimum 4.15<br>Min/Avg(Uo) 0.25<br>Min/Max 0.06          |
| <br>LL-Canopy EM                 | LL-Canopy EM<br>Qty - 3<br>Mounting Height - 4.1m<br>Tilt - 0 Degrees                          | Canopy<br>HORIZONTAL LUX<br>Average 109<br>Maximum 132<br>Minimum 63<br>Min/Avg(Uo) 0.58<br>Min/Max 0.48             |
| <br>LL-E<br>tilt = See Symbol    | LL-E<br>Qty - 4<br>Mounting Height - 3.25m<br>Tilt - See Symbol                                | Rear Walkway<br>HORIZONTAL LUX<br>Average 74<br>Maximum 113<br>Minimum 26<br>Min/Avg(Uo) 0.35<br>Min/Max 0.23        |
| <br>LL-E EM<br>tilt = See Symbol | LL-E EM<br>Qty - 17<br>Mounting Height - 3.25m<br>Tilt - See Symbol                            | Delivery Lane<br>HORIZONTAL LUX<br>Average 112<br>Maximum 142<br>Minimum 71<br>Min/Avg(Uo) 0.64<br>Min/Max 0.50      |
| <br>LL-A<br>5 degree tilt      | Single LL-A<br>Columns Qty - 7<br>Lanterns Qty - 7<br>Mounting Height - 6m<br>Tilt - 5 Degrees | Plant Area Walkway<br>HORIZONTAL LUX<br>Average 100<br>Maximum 165<br>Minimum 56<br>Min/Avg(Uo) 0.55<br>Min/Max 0.34 |
| <br>LL-C<br>5 degree tilt      | Twin LL-C<br>Columns Qty - 6<br>Lanterns Qty - 12<br>Mounting Height - 6m<br>Tilt - 5 Degrees  | Access Road<br>HORIZONTAL LUX<br>Average 17<br>Maximum 100<br>Minimum 8<br>Min/Avg(Uo) 0.49<br>Min/Max 0.08          |

**Lighting Proposal Terms and Conditions of Use**  
These terms apply to the use of this preliminary proposal produced by Signify UK. This “**Proposal**” is understood to mean this document, a CAD drawing, lighting calculations, written documents, verbal conversations or any medium used to demonstrate or communicate the proposed lighting scheme using products from Signify’s brands. A “**Customer**” is the person or organisation for whom the Proposal is intended. The “**CDM Regulations**” means The Construction, Design and Management Regulations 2015, the Safety, Health & Welfare at Work Act 2005, The Construction (Design & Management) Regulations (Northern Ireland) 2015.  
This Proposal is for guidance only and cannot be relied upon for purposes of installation or Health and Safety.  
The supply and installation of this lighting scheme are subject to a contract being agreed between Customer and Signify.

**PROPOSAL**  
(NOT FOR CONSTRUCTION)



| Rev | DSR no. | Comment            | Date     | LiAS | KAM | Project Number     | Project Name                           |
|-----|---------|--------------------|----------|------|-----|--------------------|----------------------------------------|
| 0   | 7079949 | Initial proposal.  | 20/07/26 | HSR  | RF  | 501677606          | LIDL Lampeter                          |
| 1   | 7168998 | Scale Bar included | 09/09/26 | HSR  | RF  | Scale & Sheet Size | Drawing Name                           |
|     |         |                    |          |      |     | NTS @ A3           | LiAS DESIGN NOTES & LUMINAIRE SCHEDULE |
|     |         |                    |          |      |     | Sheet No           |                                        |
|     |         |                    |          |      |     | DWG 00             |                                        |

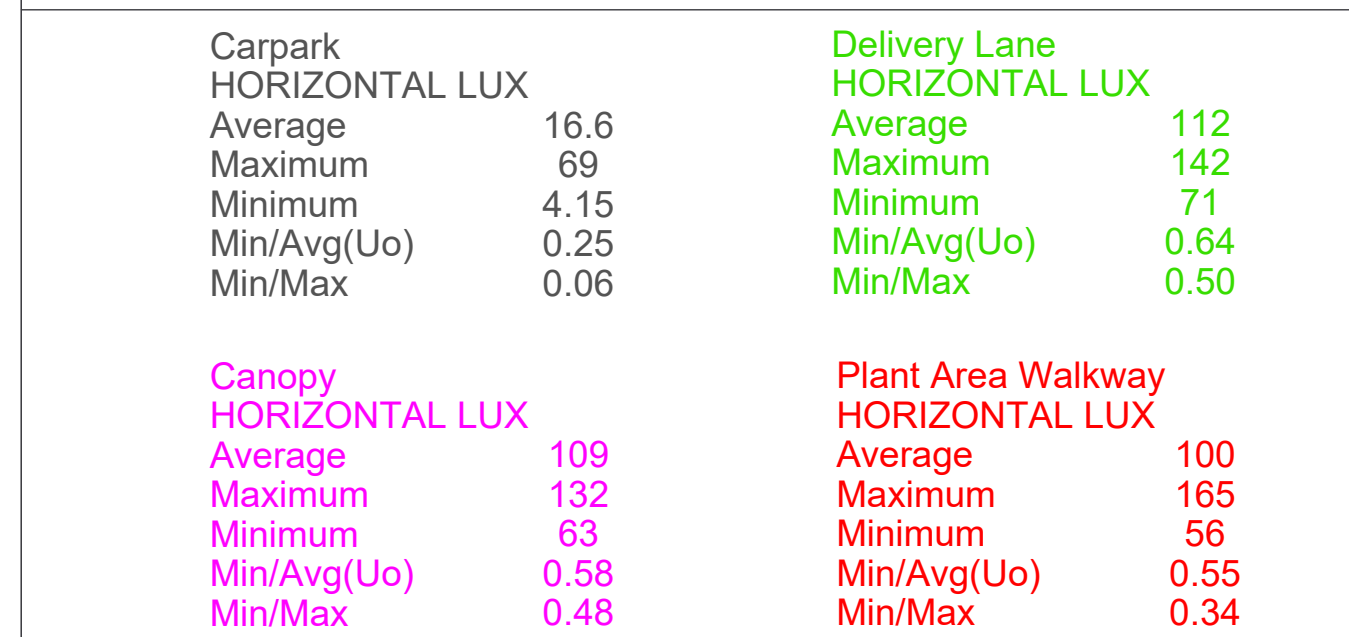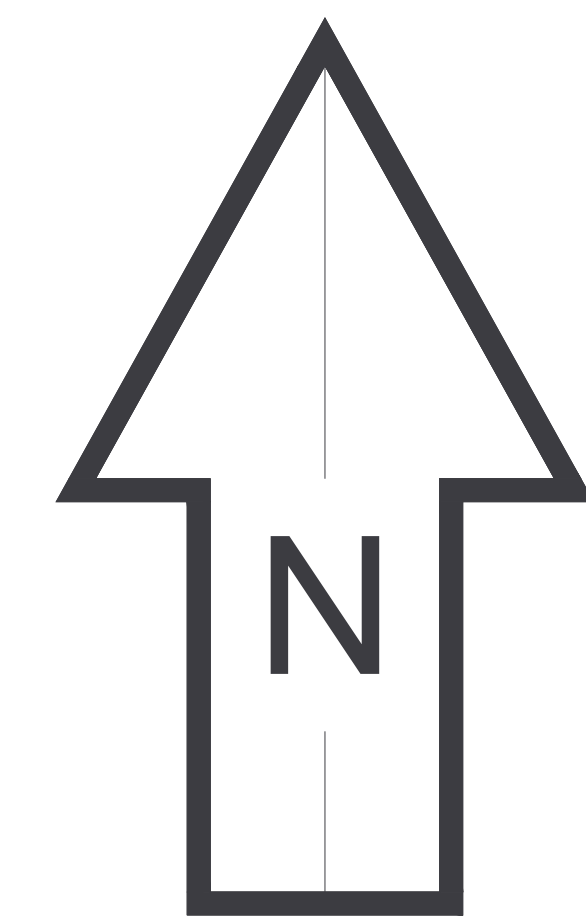

# PROPOSAL

(NOT FOR CONSTRUCTION)

| Rev | DSR no. | Comment            | Date     | LiAS | KAM | Project Number | Project Name       |
|-----|---------|--------------------|----------|------|-----|----------------|--------------------|
| 0   | 7079949 | Initial proposal.  | 20/07/26 | HSR  | RF  | 501677606      | LIDL Lampeter      |
| 1   | 7168998 | Scale Bar included | 09/09/26 | HSR  | RF  |                |                    |
|     |         |                    |          |      |     |                | Scale & Sheet Size |
|     |         |                    |          |      |     | 1:250 @ A0     |                    |
|     |         |                    |          |      |     | Sheet No       | Spill Light @ 0m   |
|     |         |                    |          |      |     | DWG 01         |                    |

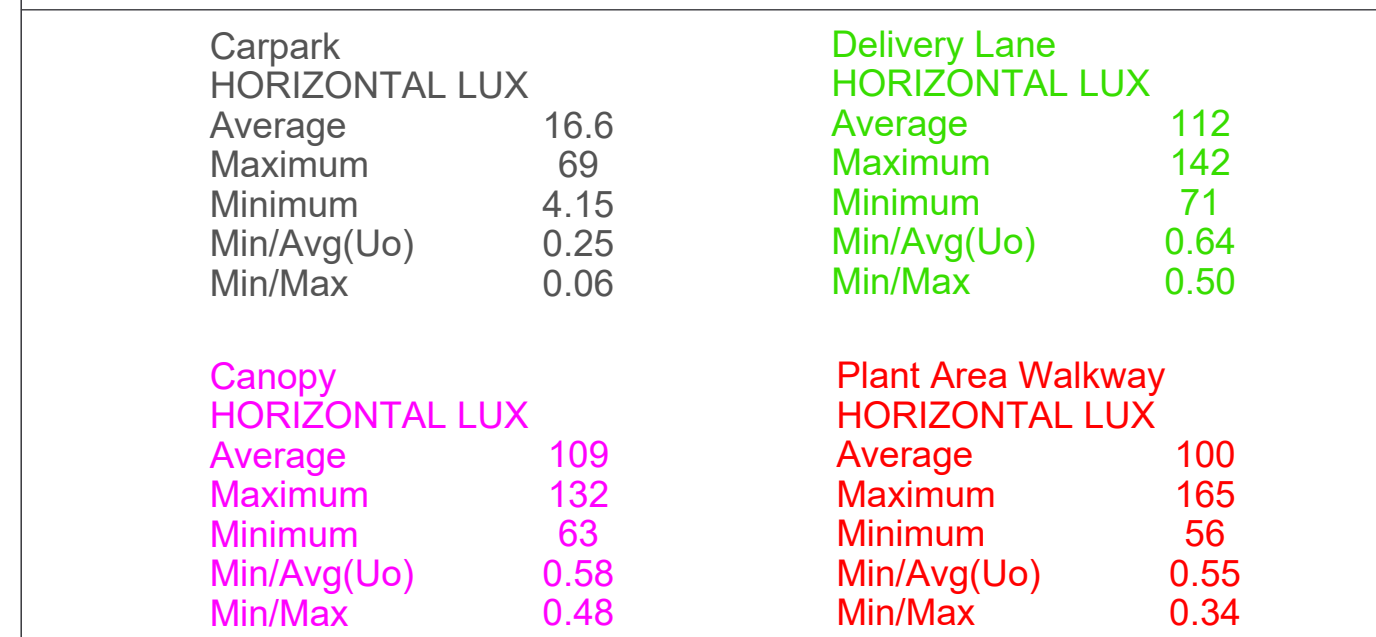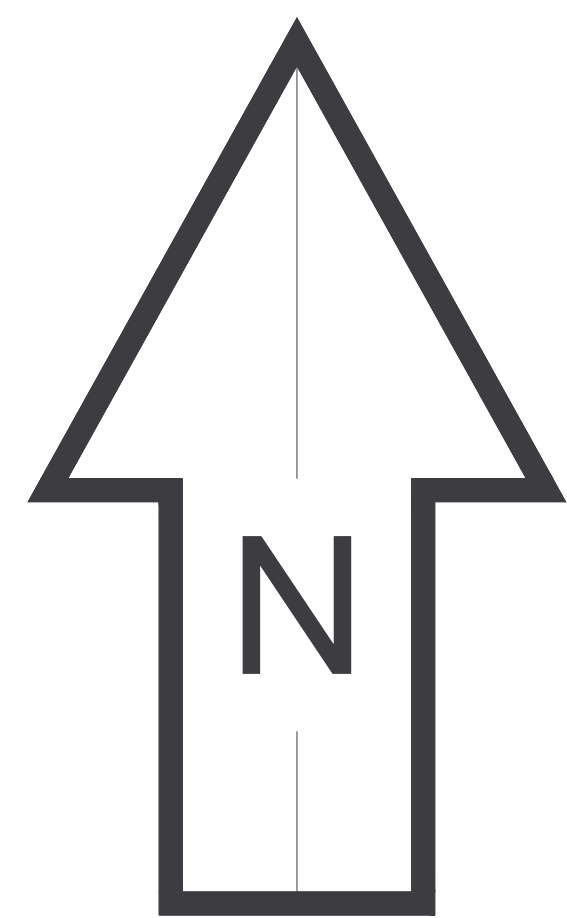

|              |                     |
|--------------|---------------------|
| Project Name | LIDL Lampeter       |
| Drawing Name | Calculation Results |

2) Do not scale for this drawing

| Rev | DSR no. | Comment            |
|-----|---------|--------------------|
| 0   | 7079949 | Initial proposal.  |
| 1   | 7168998 | Scale Bar included |

|          |      |     |                    |
|----------|------|-----|--------------------|
| Date     | LiAS | KAM | Project Number     |
| 20/07/26 | HSR  | RF  | 501677606          |
| 09/09/26 | HSR  | RF  |                    |
|          |      |     | Scale & Sheet Size |
|          |      |     | 1:200 @ A0         |
|          |      |     | Sheet No           |
|          |      |     | DWG 02             |